

A stylized, metallic-looking letter 'E' is the central focus. It is surrounded by numerous thin, blue, radiating lines that create a sense of energy or motion. Several yellow, spherical objects of varying sizes are scattered around the 'E', some appearing to be part of its structure. The background is a dark blue, textured surface with diagonal lines and a subtle grid pattern.

DAEGEON

PRODUCT CATALOGUE

www.daegeonchemicals.com

About Us



DAEGEON offer quality products a first class service, and value for money. We continue to satisfy customer's requirements by ensuring that we stay at the forefront of product development, Innovation and the latest advances in lubrication technology. We have a small management team allowing us to react quickly to customer's requirements in advances in technology, and charges regulatory requirements packaging etc.

Our comprehensive range includes, grease products, chain oils, assembly aids, coatings, high-performance lubricants, industrial oils, food grade lubricants, gear oils, open gear lubricants, synthetic lubricants, and many other lubricants & consumables.

Our international brand is distributed in more than 30 countries, having expansion worldwide line MENA, CIS and Africa. We are manufacturing a diverse range of world class speciality lubricants Car Engine Oil, Gear Oil, Hydraulic Oil, Motor Bike Oil, Pump Set Oil and CNG Oil.

We are consistently improving the performance of all our products through the development of our unique type of synthetic based oil technology combined with innovative additive packages. We utilize the most advanced formulation and state of the art technology. The products are fully tried, tested and proven both in laboratory and fields. All international standards have been followed during the manufacturing process and the laboratory checks made on all products before they leave the blending plant. We gained a global reputation for manufacturing the highest quality product, our manufacturing facility in the UAE houses state of the art American Laboratory equipped by the most advanced and latest testing and technology standards. Our high-end quality product is certified by American Petroleum Institute, ISO 14001-2015, ISO 9001-2015, ISO 18001-2007.

Well-equipped Quality control lab with latest automatic American test equipment's

1 - All the equipment are calibrated according to International standards and validated through certified agencies.

2 - All the equipment are based on international ASTM test methods and includes Stabinger viscometer (Kinematic Viscosity @ 40 and 100 Deg C), CCS, Water Separability, Automatic pour point, Foam Tester, Automatic flash point, TBN, XRF, FTIR, Brookfield test.

3 - Complete traceability of raw materials and finished product.



Vision

“ To deliver world class lubricating solution across all industries and be the partner of choice by innovative products developed in most responsible and sustainable manner”

Mission

- We aspire to be more than a Lubriant manufacturer by providing innovative product and solutions to our customers.
- We are a company where our employees are the most valuable asserts, and our success and achievements will always be a byproduct of their satisfaction and happiness.
- We are responsible company focussing on delivering sustainable products that are designed to preserve our only planet.

Core Values

- Respect
- Integrity
- Diversity
- Inclusiveness
- Trust
- Safety
- Customer Satisfaction
- Happy Employees
- Sustainability





DAEGEON

GASOLINE ENGINE OIL





SAE 0W-16 API SP

MEETS OR EXCEEDS: API SP, ILSAC GF-6B

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-16			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	42.0
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.25
5	Viscosity Index	D 2270	176
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 0W-20 API SP

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C962-A/WSS-M2C947-B1, DEXOS1™ GEN3, CHRYSLER MS6395

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	46.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.8
5	Viscosity Index	D 2270	172
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 0W-30 API SP

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C962-A/WSS-M2C947-B1, DEXOS1™ Gen3, CHRYSLER MS6395

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	48.3
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.8
5	Viscosity Index	D 2270	194
6	Flash Point ,COC,°C	D 92	224
7	Pour Point, °C	D 97	-48
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 0W-40 API SP

MEETS OR EXCEEDS: API SP, ACEAA3/B4, MB 229.3, MB 229.5, PORSCHE A40, VW 502.00/505.00.

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	74
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	13.7
5	Viscosity Index	D 2270	190
6	Flash Point ,COC,°C	D 92	226
7	Pour Point, °C	D 97	-45
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

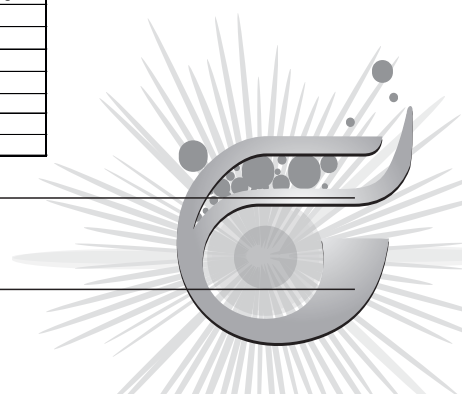



SAE 5W-20 API SP

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C960-A/WSS-M2C945-B1, DEXOS1™ GEN3, CHRYSLER MS6395

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	47.9
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.95
5	Viscosity Index	D 2270	165
6	Flash Point, °C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-30 API SP

MEETS OR EXCEEDS: API SP, ILSAC GF-6A, FORD WSS-M2C961-A/WSS-M2C946-B1, DEXOS1™ GEN3, CHRYSLER MS6395

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	75.9
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	12.1
5	Viscosity Index	D 2270	156
6	Flash Point, °C	D 92	220
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	8.1

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-40 API SP

MEETS OR EXCEEDS: API SP, ACEA A3/B4, MB 229.5, PORSCHE A40, VW 502.00/505.00, RENAULT RN 0700/0710

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	86.8
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.1
5	Viscosity Index	D 2270	168
6	Flash Point, °C	D 92	220
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 0W-20 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	43.0
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.3
5	Viscosity Index	D 2270	172
6	Flash Point, °C	D 92	216
7	Pour Point, °C	D 97	-45
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

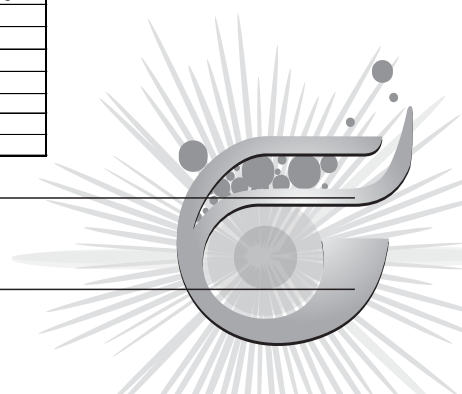



SAE 0W-30 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	65.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.7
5	Viscosity Index	D 2270	176
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 0W-40 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-947A, DEXOS1™, GMW16076/16182

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	86.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.5
5	Viscosity Index	D 2270	175
6	Flash Point ,COC,°C	D 92	228
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-20 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-945A, DEXOS1™, GMW16096/161820

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	46.3
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.8
5	Viscosity Index	D 2270	165
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 5W-30 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, FORD WSS-M2C-946A, DEXOS1™, GMW 16181, GMW15827

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	69
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.8
5	Viscosity Index	D 2270	165
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-39
8	TBN mg/KOH/g	D 2896	7.0

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

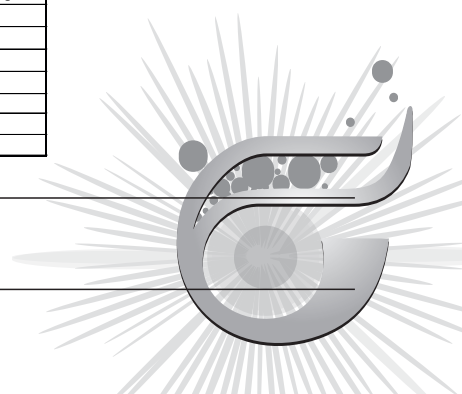



SAE 5W-40 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, ACEA A3/B4-16, MB229.3, MB229.5, PORSCHE A40, VW 502.00/505.00, RENAULT RN 0710/0700, GM-LL-B-025, BMW LL-01

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	84
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	13.5
5	Viscosity Index	D 2270	168
6	Flash Point ,COC,°C	D 92	230
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	7.3

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-30 API SN

MEETS OR EXCEEDS: API SN, ILSAC GF-5, CHRYSLER MS-6395

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	76
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.9
5	Viscosity Index	D 2270	152
6	Flash Point ,COC,°C	D 92	228
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	7.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API SN

MEETS OR EXCEEDS: API SN, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1 MB 229.1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	101
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.2
5	Viscosity Index	D 2270	151
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 10W-50 API SN

MEETS OR EXCEEDS: API SN, ACEA A3/B4-16, MB229.3, RENAULT RN 0710/0700, PSA B71 2300, ACEA A3/B3-16, MB 229.1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	127
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	18.6
5	Viscosity Index	D 2270	165
6	Flash Point ,COC,°C	D 92	224
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

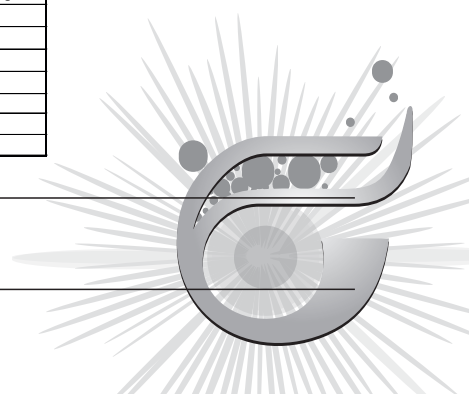



SAE 10W-30 API SL

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	62.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	10.01
5	Viscosity Index	D 2270	146
6	Flash Point ,COC,°C	D 92	228
7	Pour Point, °C	D 97	-39
8	TBN mg/KOH/g	D 2896	7.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API SL

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1, JASO MA2, VW 501.01/505.00, VW 502.00/505.00, MB 229.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	62.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	10.01
5	Viscosity Index	D 2270	146
6	Flash Point ,COC,°C	D 92	228
7	Pour Point, °C	D 97	-39
8	TBN mg/KOH/g	D 2896	7.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 15W-40 API SL

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1, VW 505.00

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 15W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	112.52
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.70
5	Viscosity Index	D 2270	148
6	Flash Point ,COC,°C	D 92	224
7	Pour Point, °C	D 97	-30
8	TBN mg/KOH/g	D 2896	8.3

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 20W-50 API SL

MEETS OR EXCEEDS: API SL, ACEAA3/B3-16, MB 229.1


TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W-50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	178.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	19.63
5	Viscosity Index	D 2270	126
6	Flash Point ,COC,°C	D 92	238
7	Pour Point, °C	D 97	-27
8	TBN mg/KOH/g	D 2896	7.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

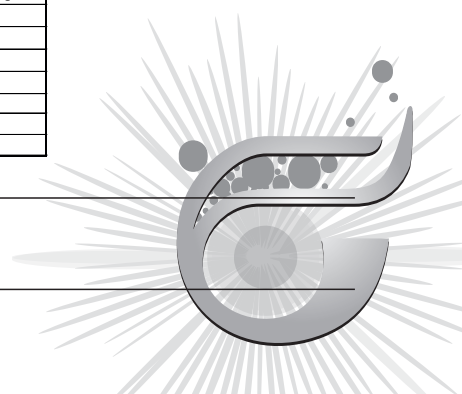

DIESEL ENGINE OIL

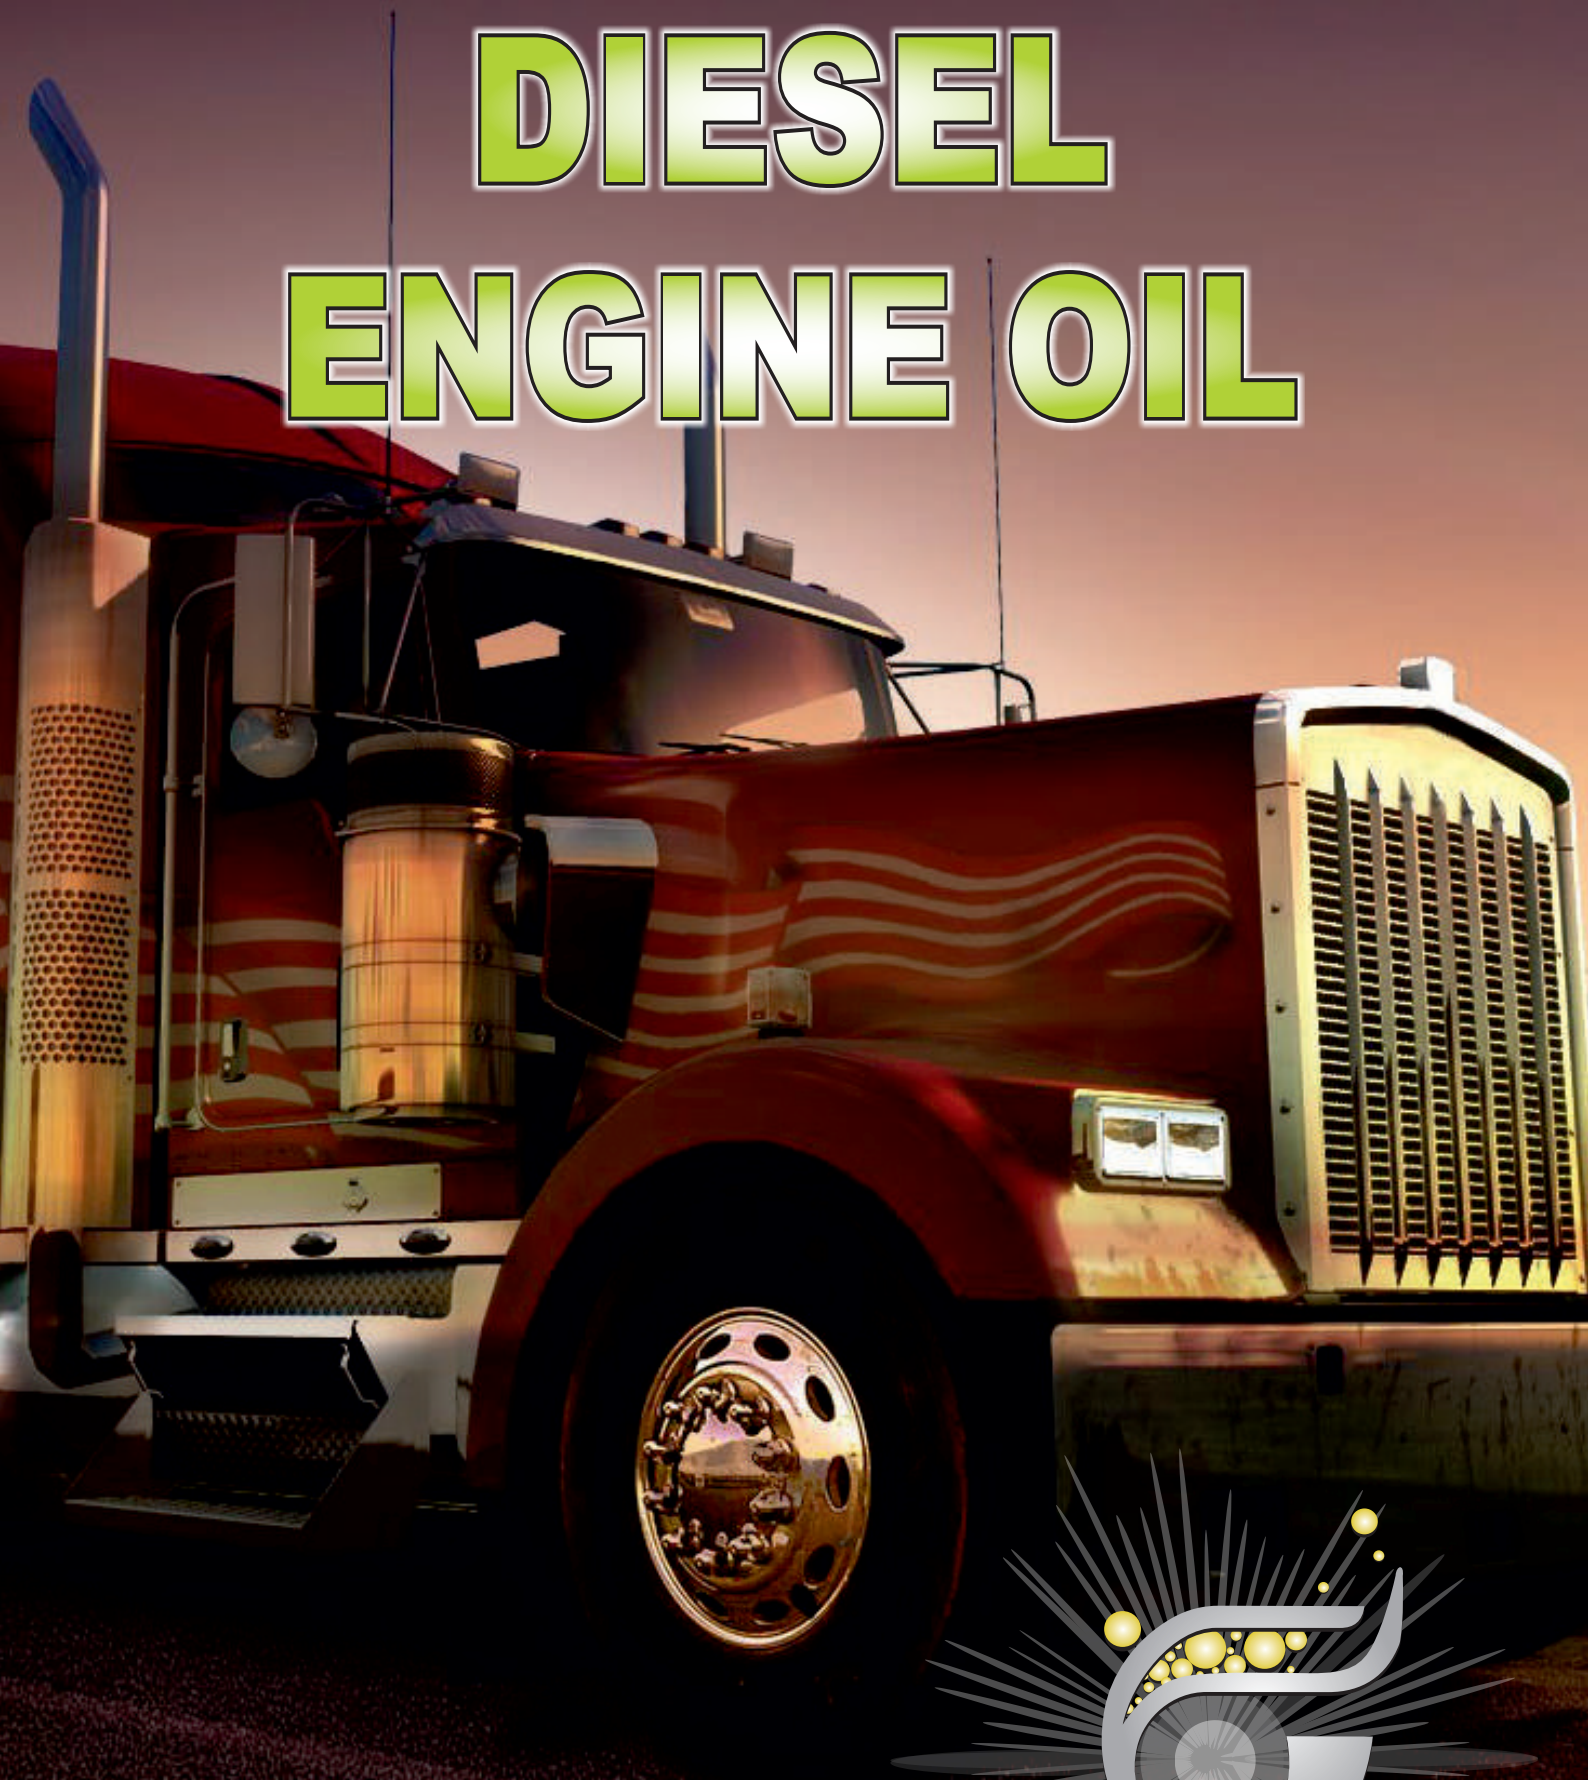



SAE 5W-20 API CK-4/SN

MEETS OR EXCEEDS: API CK-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	48.75
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.94
5	Viscosity Index	D 2270	166
6	Flash Point, °C	D 92	218
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	10.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-30 API CK-4/SN

MEETS OR EXCEEDS: API CK-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	69
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.8
5	Viscosity Index	D 2270	168
6	Flash Point, °C	D 92	222
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	10.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-40 API CK-4/SN

MEETS OR EXCEEDS: API CK-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	90
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.6
5	Viscosity Index	D 2270	170
6	Flash Point, °C	D 92	220
7	Pour Point, °C	D 97	-48
8	TBN mg/KOH/g	D 2896	10.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 10W-30 API CK-4

MEETS OR EXCEEDS: API CK-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	75
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.8
5	Viscosity Index	D 2270	152
6	Flash Point, °C	D 92	224
7	Pour Point, °C	D 97	-39
8	TBN mg/KOH/g	D 2896	10.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

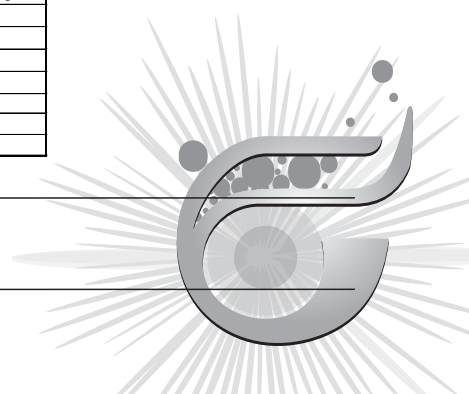



SAE 10W-40 API CK-4

MEETS OR EXCEEDS: API CK-4, CAT ECF-3, CUMMINS CES 20086, MAN M3775, MB 228.31, VOLVO VDS-4.5, ACEA E7-16, ACEA E9-16

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	101
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.2
5	Viscosity Index	D 2270	158
6	Flash Point, °C	D 92	222
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.7

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 0W-30 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, MTU TYPE 3.1/2.1, DEUTZ DQC 111-10 LA, GLOBAL DHD-1, JASO DH-2, MACK EOPREMIUM PLUS, DETROIT DIESEL DDC 93K218

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 0W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	66.75
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.07
5	Viscosity Index	D 2270	158
6	Flash Point, °C	D 92	216
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-30 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, SCANIA LDF-4, DEUTZ DQC-IV-10 LA, VOLVO VDS-3, MAN M3477/M3575, MACK EOPREMIUM PLUS, DETROIT DIESEL DDC 9

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	67.86
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.35
5	Viscosity Index	D 2270	161
6	Flash Point, °C	D 92	218
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 5W-40 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, MTU TYPE-I & II, DEUTZ DQC-IV-10 LA, VOLVO VDS-4, RENAULT TRUCKS RLD-3, DDC POWER GUARD 93K218

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	100.21
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.75
5	Viscosity Index	D 2270	168
6	Flash Point, °C	D 92	220
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

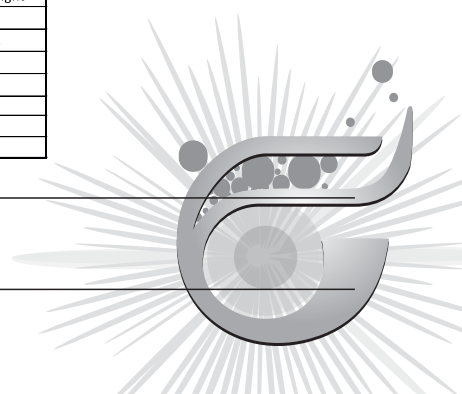



SAE 10W-30 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, RENAULT TRUCKS RLD-3, VOLVO VDS-4, MAN M3575, MTU TYPE 3.1/2.1, CATERPILLAR ECF-2 & ECF-3, DEUTZ DQC-III-10 LA

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	67.90
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.45
5	Viscosity Index	D 2270	163
6	Flash Point ,COC,°C	D 92	218
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, RENAULT TRUCKS RLD-3, VOLVO VDS-4, MTU TYPE 3.1/2.1, JASO DH-2, DEUTZ DQCIII-10 LA, MACK EO-PREMIUM PLUS, GLOBALDH

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	104.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.65
5	Viscosity Index	D 2270	160
6	Flash Point ,COC,°C	D 92	222
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 15W-40 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E7-08/E9-08, MB 228.31, CUMMINS CES 20081, RENAULT TRUCKS RLD-3, VOLVO VDS-4, MTU TYPE 3.1/2.1, JASO DH-2, DEUTZ DQCIII-10 LA, MACK EO-PREMIUM PLUS, GLOBALDHD-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 15W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	104.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.65
5	Viscosity Index	D 2270	160
6	Flash Point ,COC,°C	D 92	226
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 20W-50 API CJ4/SN

MEETS OR EXCEEDS: API CJ4/CI-4+, SN/CF, ACEA E9-08, MB 228.31, CUMMINS CES 20081, RENAULT TRUCKS RLD-3, VOLVO VDS-4, MTU TYPE 3.1/2.1, CATERPILLER ECF-3, MAN M3477/M3575, MACK EO-O PREMIUM PLUS, FORD WSS-M2C171-F1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W-50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	169.52
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	20.78
5	Viscosity Index	D 2270	144
6	Flash Point ,COC,°C	D 92	232
7	Pour Point, °C	D 97	-30
8	TBN mg/KOH/g	D 2896	10.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

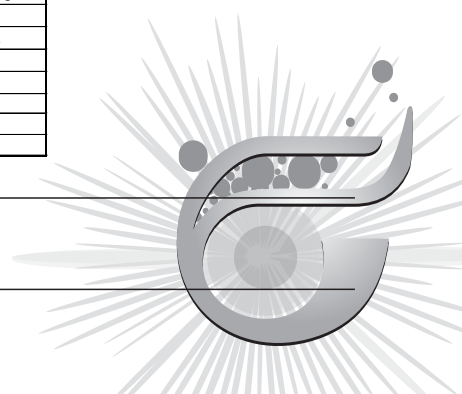



SAE 5W-20 API CI4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.3, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-20			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	47.52
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.75
5	Viscosity Index	D 2270	165
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	10.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-30 API CI4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	67.25
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.52
5	Viscosity Index	D 2270	164
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	10.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 5W-40 API CI4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 5W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	67.25
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.52
5	Viscosity Index	D 2270	164
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-42
8	TBN mg/KOH/g	D 2896	10.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 15W-40 API CI-4

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 15W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	111.6
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.2
5	Viscosity Index	D 2270	142
6	Flash Point ,COC,°C	D 92	236
7	Pour Point, °C	D 97	-30
8	TBN mg/KOH/g	D 2896	10.7

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

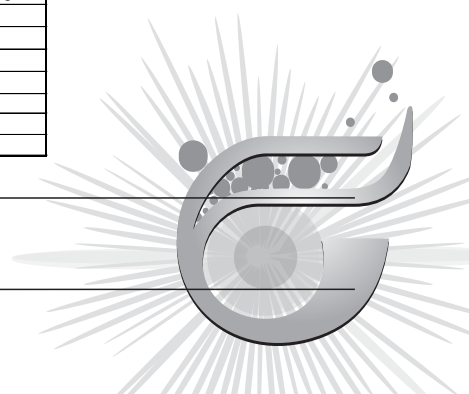



SAE 10W-30 API CI4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.3, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	72
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	10.8
5	Viscosity Index	D 2270	140
6	Flash Point ,COC,°C	D 92	224
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	10.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API CI4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	98.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.27
5	Viscosity Index	D 2270	148
6	Flash Point ,COC,°C	D 92	226
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 15W-30 API CI-4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MB228.1, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, CATERPILLAR ECF-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 15W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	118
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.7
5	Viscosity Index	D 2270	141
6	Flash Point ,COC,°C	D 92	226
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 15W-40 API CI-4/SL

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MAN 3275, VOLVO VDS-3, RENAULT RLD-2, CUMMINS CES 20077, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 15W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	118
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.7
5	Viscosity Index	D 2270	141
6	Flash Point ,COC,°C	D 92	228
7	Pour Point, °C	D 97	-33
8	TBN mg/KOH/g	D 2896	10.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

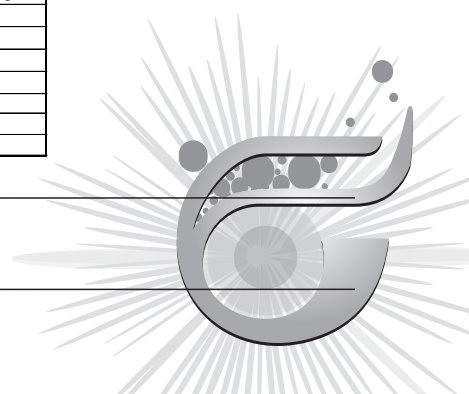



SAE 20W-50 API CI-4

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MAN 3275, CATERPILLAR ECF -1A, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W- 50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	165
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	18.5
5	Viscosity Index	D 2270	126
6	Flash Point ,COC,°C	D 92	236
7	Pour Point, °C	D 97	-27
8	TBN mg/KOH/g	D 2896	11.2

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE HD-40 API CI-4

MEETS OR EXCEEDS: API CI-4, ACEA E7-16, MAN 3275, CATERPILLAR ECF -1A, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE HD-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	142.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	16.2
5	Viscosity Index	D 2270	120
6	Flash Point ,COC,°C	D 92	234
7	Pour Point, °C	D 97	-24
8	TBN mg/KOH/g	D 2896	10.23

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE HD-50 API CI-4

MEETS OR EXCEEDS: API CI4, ACEAE7-16, MAN M3275, CATERPILLAR ECF - 1A, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE HD- 50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	202.3
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	21.02
5	Viscosity Index	D 2270	123
6	Flash Point ,COC,°C	D 92	236
7	Pour Point, °C	D 97	-22
8	TBN mg/KOH/g	D 2896	10.3

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE HD-60 API CI-4

MEETS OR EXCEEDS: API CI4, ACEAE7-16, MAN M3275, CATERPILLAR ECF - 1A, MB 228.3

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE HD- 60			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	47.25
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.65
5	Viscosity Index	D 2270	163
6	Flash Point ,COC,°C	D 92	216
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	10.1

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

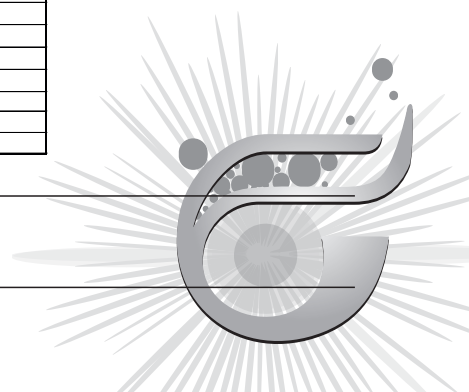

MOTORCYCLE ENGINE OIL



DÆGEON



2T TC

MEETS OR EXCEEDS: API TC, JASO FD, ISO E-GC, E-GD

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
2T TC			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	62.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.15
5	Viscosity Index	D 2270	126
6	Flash Point, °C	D 92	78
7	Pour Point, °C	D 97	-9
8	TBN mg/KOH/g	D 2896	8.0

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API SL 4T

MEETS OR EXCEEDS: API SL, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
10W-40 4T			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	95
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.30
5	Viscosity Index	D 2270	155
6	Flash Point, °C	D 92	226
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	8.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 15W-40 API SL 4T

MEETS OR EXCEEDS: API SL, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
15W-40 4T			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	107
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14
5	Viscosity Index	D 2270	140
6	Flash Point, °C	D 92	230
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	9.8

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 20W-40 API SL 4T

MEETS OR EXCEEDS: API SL, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W-40			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	113.85
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.22
5	Viscosity Index	D 2270	140
6	Flash Point, °C	D 92	228
7	Pour Point, °C	D 97	-30
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

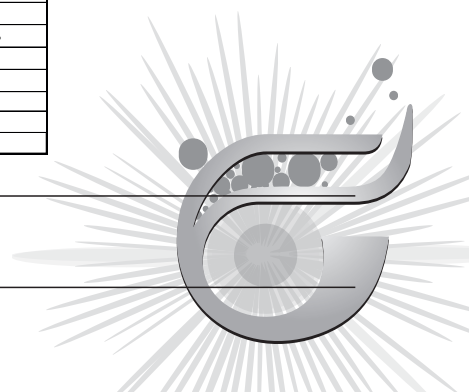



SAE 10W-30 API SN 4T

MEETS OR EXCEEDS: API SN, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W-30 4T			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	66.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	10.9
5	Viscosity Index	D 2270	151
6	Flash Point, °C	D 92	239
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	7.4

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 10W-40 API SN 4T

MEETS OR EXCEEDS: API SN, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 10W- 40 4T			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	94
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.5
5	Viscosity Index	D 2270	160
6	Flash Point, °C	D 92	236
7	Pour Point, °C	D 97	-39
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 15W-40 API SN 4T

MEETS OR EXCEEDS: API SN, JASO MA2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W- 50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	105
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.4
5	Viscosity Index	D 2270	135
6	Flash Point, °C	D 92	211
7	Pour Point, °C	D 97	-36
8	TBN mg/KOH/g	D 2896	7.5

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 20W-50 API SN 4T

MEETS OR EXCEEDS: API SN, JASO MA2


TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 20W- 50			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	165
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	18.5
5	Viscosity Index	D 2270	126
6	Flash Point, °C	D 92	236
7	Pour Point, °C	D 97	-27
8	TBN mg/KOH/g	D 2896	7.6

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

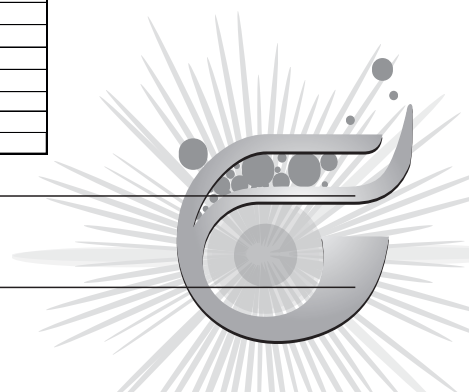

AUTOMATIC TRANSMISSION FLUID

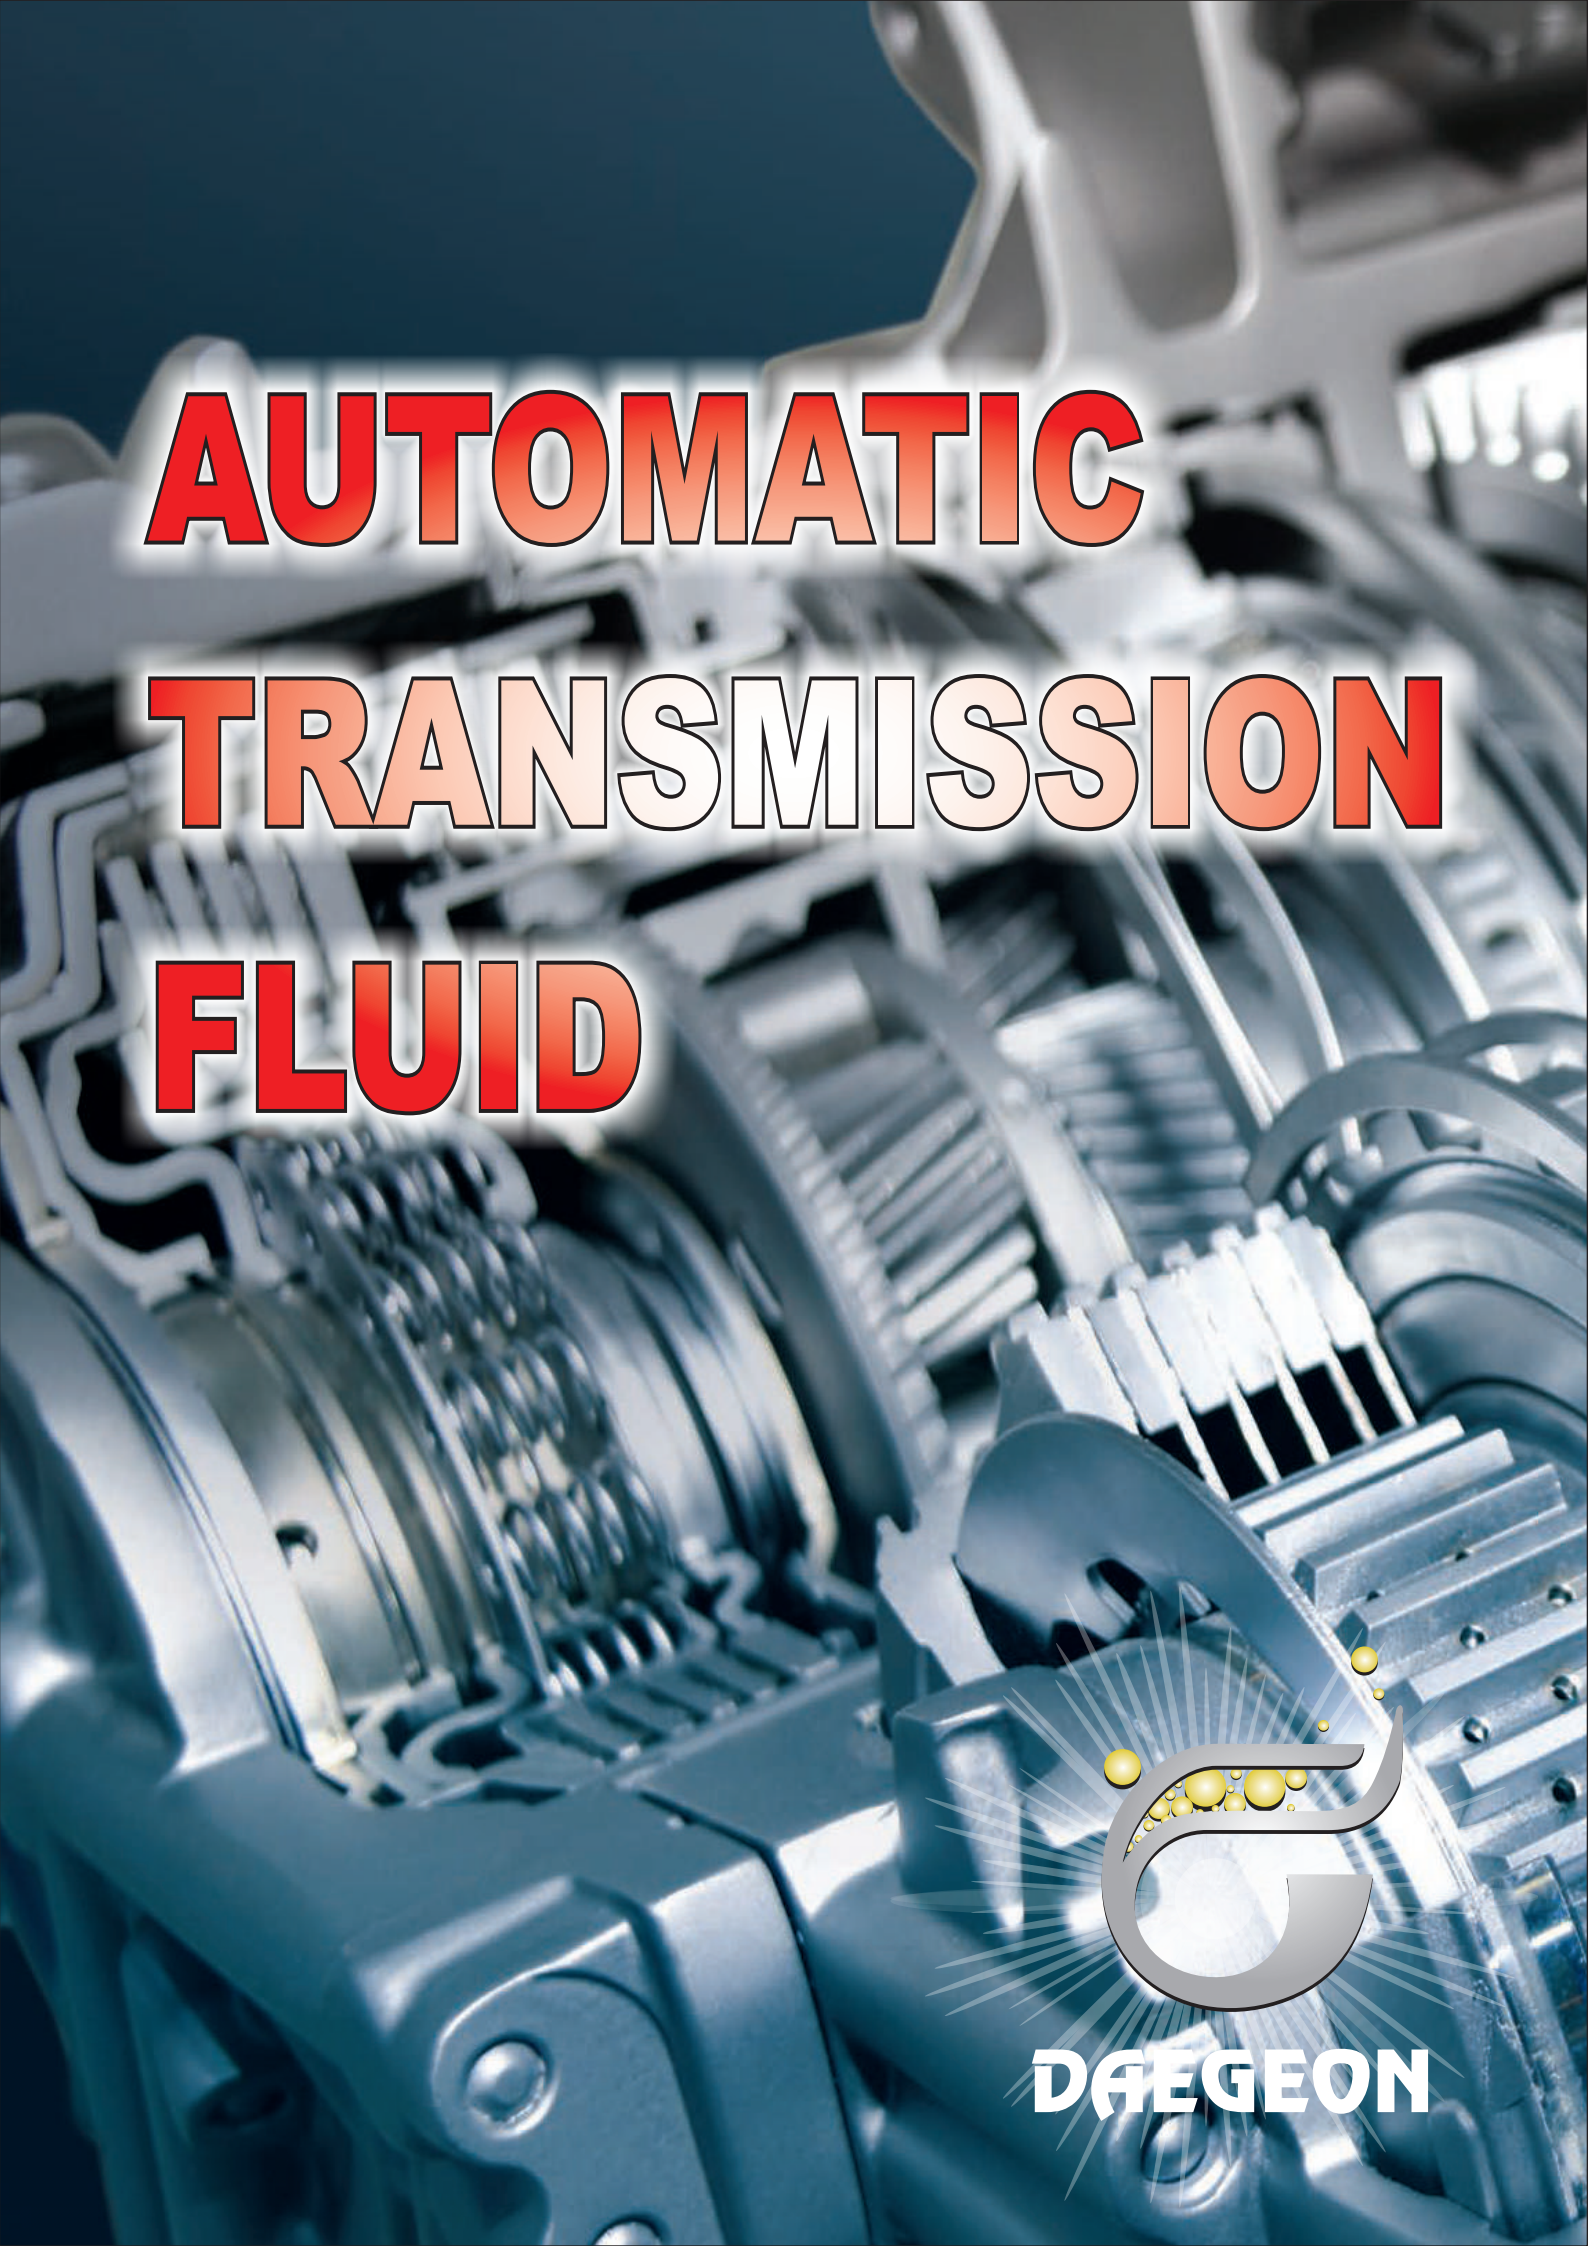

DÆGEON



ATF TYPE A

MEETS OR EXCEEDS: MAN 339Z1.V1, MB236.1, ZF TE-ML03D, 04D, 14A, ZF TE-ML 17C, 03D

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
TYPE A			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	39.6
4	Kinematic, Viscosity mm ² /s @ 100°C	D 2270	7.2
5	Viscosity Index	D 92	147
6	Flash Point ,COC,°C	D 97	210
7	Pour Point, °C	D 445	-24

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



DEXRON II

MEETS OR EXCEEDS: ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
DEXRON II			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	36.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 2270	7.1
5	Viscosity Index	D 92	161
6	Flash Point ,COC,°C	D 97	212
7	Pour Point, °C	D 445	-33

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




DEXRON III

MEETS OR EXCEEDS: ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
DEXRON II			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	35
4	Kinematic, Viscosity mm ² /s @ 100°C	D 2270	7.1
5	Viscosity Index	D 92	171
6	Flash Point ,COC,°C	D 97	212
7	Pour Point, °C	D 445	-36

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

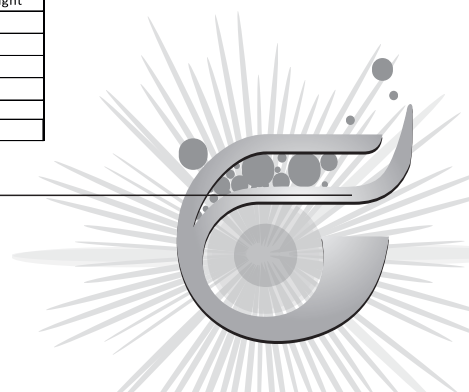



DEXRON IV

MEETS OR EXCEEDS: ALLISON TES-389, CAT TO-2, VOLVO 97340, ZF TE-ML 05L, 09, 21L, ALLISON C-4, VOITH H55.6335.XX, GM 3H

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
DEXRON IV			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity m ² /s @ 40°C	D 445	34.7
4	Kinematic, Viscosity m ² /s @ 100°C	D 2270	7.1
5	Viscosity Index	D 92	173
6	Flash Point ,COC,°C	D 97	212
7	Pour Point, °C	D 445	-36

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



DEXRON VI

MEETS OR EXCEEDS: CHRYSLER M1375.4, AUDI/VW G-052-162-A1/A2, BMW ETL-7045, 7045E, JAGUAR ATF 3403 M115, VOLVO 97340, GM DEXRON VI

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
DEXRON VI			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity m ² /s @ 40°C	D 445	35.2
4	Kinematic, Viscosity m ² /s @ 100°C	D 2270	7.21
5	Viscosity Index	D 92	175
6	Flash Point ,COC,°C	D 97	218
7	Pour Point, °C	D 445	-42

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




CVT NS2/NS3

MEETS OR EXCEEDS: CVT, NS2, NS2, HYUNDAI SP CVT 1, KIA SP CVT-1, TOYOTA TC, NISSAN CVS NS-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
CVT NS2/NS3			
1	Appearance	Visual	Clear & Bright
2	Color	Visual	Red
3	Kinematic, Viscosity m ² /s @ 40°C	D 445	28.76
4	Kinematic, Viscosity m ² /s @ 100°C	D 2270	6.5
5	Viscosity Index	D 92	191
6	Flash Point ,COC,°C	D 97	218
7	Pour Point, °C	D 445	-45

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

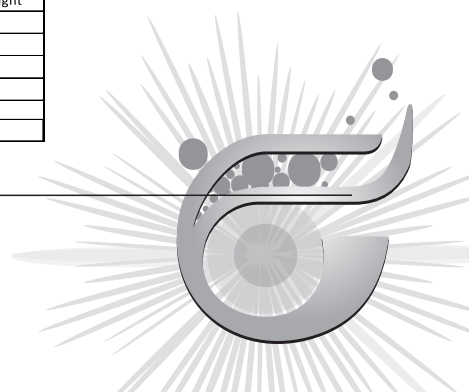

GEAR OILS





SAE 75W-80 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 75W-80			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	56.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.7
5	Viscosity Index	D 2270	159
6	Flash Point ,COC,°C	D 92	210
7	Pour Point, °C	D 97	-36

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 75W-90 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 75W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	99
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.8
5	Viscosity Index	D 2270	156
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-30

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 80W-90 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 80W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	152
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	17.5
5	Viscosity Index	D 2270	126
6	Flash Point ,COC,°C	D 92	234
7	Pour Point, °C	D 97	-30

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 80W-140 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 80W-140			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	232
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	25.4
5	Viscosity Index	D 2270	139
6	Flash Point ,COC,°C	D 92	250
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

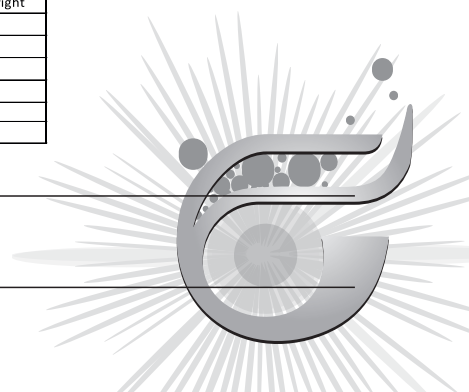



SAE 85W-90 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 85W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	143.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	17.8
5	Viscosity Index	D 2270	138
6	Flash Point ,COC,°C	D 92	248
7	Pour Point, °C	D 97	-28

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 85W-140 GL-4

MEETS OR EXCEEDS: API GL-4, DIN 51517 Part 3 (CLP), ISO 12925-1 CKC, US Steel 224, ISO6743 - 6 CKC, SAE J2360, AGMA252.04, MT-1

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 85W-140			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	245
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	27.3
5	Viscosity Index	D 2270	145
6	Flash Point ,COC,°C	D 92	250
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 75W-90 GL-5

MEETS OR EXCEEDS: API GL-5, SAE J 2360, MAN 342 S1, Scania STO 2:0, ZF TE-ML 05B, 12L, 12N, 16F, 17B, 19C, 21B

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 75W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	101
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	15.4
5	Viscosity Index	D 2270	161
6	Flash Point ,COC,°C	D 92	224
7	Pour Point, °C	D 97	-36

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 80W-90 GL-5

MEETS OR EXCEEDS: MAN 342 M1, SCANIA STO 1.0, VOLVO 1273.10

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 80W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	155
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	17.5
5	Viscosity Index	D 2270	124
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-24

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

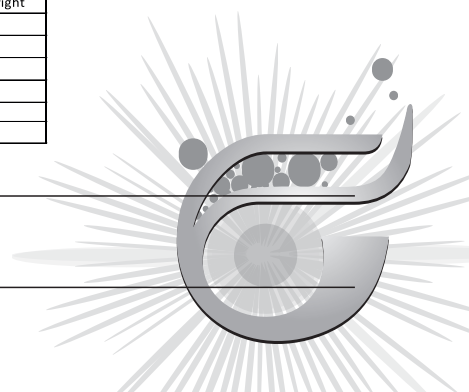



SAE 85W-90 GL-5

MEETS OR EXCEEDS: API GL-5, Scania STO 2:0A

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 85W-90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	143.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	16.5
5	Viscosity Index	D 2270	123
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-24

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 85W-140 GL-5

MEETS OR EXCEEDS: MAN 342 M1, SCANIASTO 1.0, ZF TE-ML 05A

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 85W-140			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	245
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	27.4
5	Viscosity Index	D 2270	146
6	Flash Point ,COC,°C	D 92	250
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SAE 90 GL-5

MEETS OR EXCEEDS: MAN 342 M1, SCANIASTO 1.0, VOLVO 1273.10

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 90			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	155
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	16.5
5	Viscosity Index	D 2270	113
6	Flash Point ,COC,°C	D 92	212
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




SAE 90W-140 GL-5

MEETS OR EXCEEDS: MAN 342 M1, SCANIASTO 1.0, ZF TE-ML 05A

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
SAE 90W-140			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	362
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	26
5	Viscosity Index	D 2270	97
6	Flash Point ,COC,°C	D 92	232
7	Pour Point, °C	D 97	-27

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

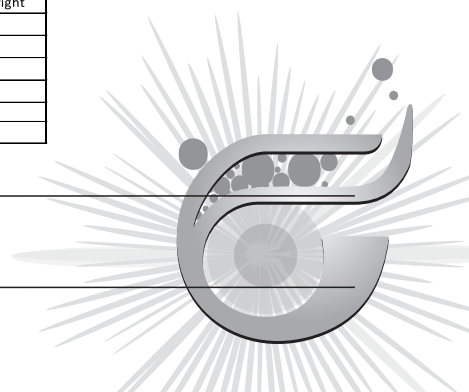

INDUSTRIAL OILS





AW 32

MEETS OR EXCEEDS: CINCINNATI P-68, DIN 51524-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	AW 32
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	32.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	5.44
5	Viscosity Index	D 2270	102
6	Flash Point ,COC,°C	D 92	200
7	Pour Point, °C	D 97	-32
8	Rust Test	D 665A	PASS
9	Emulsion Test @54°C	D 1401	PASS
10	Emulsion Test @82°C	D 1401	-

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



AW 46

MEETS OR EXCEEDS: CINCINATI P-70, DIN 51524-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	AW 46
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	46.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	6.85
5	Viscosity Index	D 2270	102
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-30
8	Rust Test	D 665A	PASS
9	Emulsion Test @54°C	D 1401	PASS
10	Emulsion Test @82°C	D 1401	-

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



AW 68

MEETS OR EXCEEDS: CINCINATI P-69, DIN 51524-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	AW 68
1	Appearance	Visual	C & B
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	68.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	8.87
5	Viscosity Index	D 2270	102
6	Flash Point ,COC,°C	D 92	230
7	Pour Point, °C	D 97	-24
8	Rust Test	D 665A	PASS
9	Emulsion Test @54°C	D 1401	PASS
10	Emulsion Test @82°C	D 1401	-

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




AW 100

MEETS OR EXCEEDS: CINCINATI P-69, DIN 51524-2

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	AW 100
1	Appearance	Visual	C & B
2	Color	D 1500	L2.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	100.3
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.32
5	Viscosity Index	D 2270	98
6	Flash Point ,COC,°C	D 92	232
7	Pour Point, °C	D 97	-21
8	Rust Test	D 665A	PASS
9	Emulsion Test @54°C	D 1401	-
10	Emulsion Test @82°C	D 1401	PASS

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

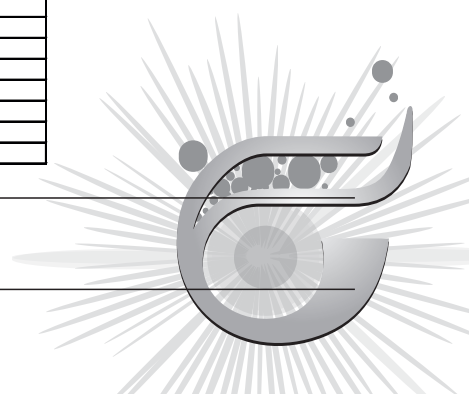



ISO 32

MEETS OR EXCEEDS: ISO-L-DAJ, DIN 51506 VDL, GM LJ-04-3-04, SAE MS1003-2 Type DPJ

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	ISO 32
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	32.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	5.6
5	Viscosity Index	D 2270	113
6	Flash Point ,COC,°C	D 92	226
7	Pour Point, °C	D 97	-27

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



ISO 46

MEETS OR EXCEEDS: ISO-L-DAJ, DIN 51506 VDL, GM LJ-04-3-04, SAE MS1003-2 Type DPJ

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	ISO 46
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	45.95
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	7.1
5	Viscosity Index	D 2270	113
6	Flash Point ,COC,°C	D 92	230
7	Pour Point, °C	D 97	-27

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



ISO 68

MEETS OR EXCEEDS: ISO-L-DAJ, DIN 51506 VDL, GM LJ-04-3-04, SAE MS1003-2 Type DPJ

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	ISO 68
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	67.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.1
5	Viscosity Index	D 2270	110
6	Flash Point ,COC,°C	D 92	230
7	Pour Point, °C	D 97	-24

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



ISO 100

MEETS OR EXCEEDS: ISO-L-DAJ, DIN 51506 VDL, GM LJ-04-3-04, SAE MS1003-2 Type DPJ

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	ISO 100
1	Appearance	Visual	C & B
2	Color	D 1500	L1.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	100.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.9
5	Viscosity Index	D 2270	109
6	Flash Point ,COC,°C	D 92	236
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk





HD 150

MEETS OR EXCEEDS: AISE 224, David Brown S1.53.101(E), AGMA 9005-F16 (AS)

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	HD 150
1	Appearance	Visual	C & B
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	150.1
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	14.72
5	Viscosity Index	D 2270	97
6	Flash Point ,COC,°C	D 92	234
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



HD 220

MEETS OR EXCEEDS: AISE 224, David Brown S1.53.101(E), AGMA 9005-F16 (AS)

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	HD 220
1	Appearance	Visual	C & B
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	221.5
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	18.92
5	Viscosity Index	D 2270	96
6	Flash Point ,COC,°C	D 92	236
7	Pour Point, °C	D 97	-18

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



HD 320

MEETS OR EXCEEDS: AISE 224, David Brown S1.53.101(E), AGMA 9005-F16 (AS)

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	HD 320
1	Appearance	Visual	C & B
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	320.4
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	24.1
5	Viscosity Index	D 2270	96
6	Flash Point ,COC,°C	D 92	240
7	Pour Point, °C	D 97	-18

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



HD 460

MEETS OR EXCEEDS: AISE 224, David Brown S1.53.101(E), AGMA 9005-F16 (AS)

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	HD 460
1	Appearance	Visual	C & B
2	Color	D 1500	L3.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	461.2
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	30.3
5	Viscosity Index	D 2270	95
6	Flash Point ,COC,°C	D 92	250
7	Pour Point, °C	D 97	-18

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk





VACUUM PUMP OIL

MEETS OR EXCEEDS: ISO 6743-3-L-DVC, GOST: 23013-78 specification for vacuum pumps oil and is recommended for high vacuum producing diffusion pumps

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	RESULTS
VACUUM PUMP OIL ISO VG 68			
1	Appearance	Visual	C & B
2	Color	D 1500	L1.0
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	68.3
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.21
5	Viscosity Index	D 2270	111
6	Flash Point ,COC,°C	D 92	230
7	Pour Point, °C	D 97	-21

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



SOLUBLE CUTTING FLUID

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	VALUE
1	Color	VISUAL	REDISH BROWN
2	Kinematic, Viscosity mm ² /s @ 40°C	ASTM D445	53
3	pH @5%	ASTM D1287	9.5
4	Flash Point ,COC,°C	ASTM D 92	190
5	Emulsion Stability	ASTM D1479	PASS

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk



MARINE ENGINE OIL

MEETS OR EXCEEDS: 2 STROKE, OUTBOARD TCW-3, NMMA

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
2 STROKEMARINE OUTBOARD TCW3			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	BLUE
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	57.7
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	9.1
5	Viscosity Index	D 2270	137
6	Flash Point ,COC,°C	D 92	110
7	Pour Point, °C	D 97	-36

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




AGRICULTURE GEAR OIL

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
UTTO 10W-30			
1	Appearance	Visual	Clear & Bright
2	Color	D 1500	L2.5
3	Kinematic, Viscosity mm ² /s @ 40°C	D 445	78.64
4	Kinematic, Viscosity mm ² /s @ 100°C	D 445	11.6
5	Viscosity Index	D 2270	140
6	Flash Point ,COC,°C	D 92	220
7	Pour Point, °C	D 97	-39

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

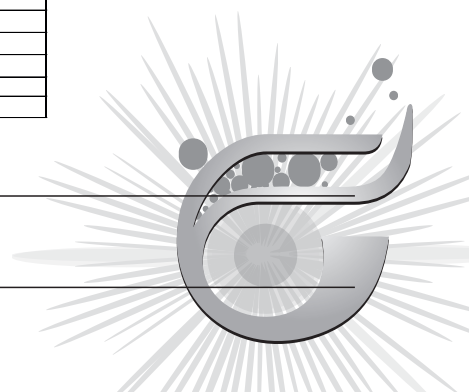

CAR CARE PRODUCTS





BRAKE FLUID DOT3

MEETS OR EXCEEDS: SAE J1703, FMVSS-116, ISO 4925

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
			DOT-3
1	Appearance	VISUAL	CLEAR & BRIGHT
2	pH	FMVSS 116	7.8
3	Color	VISUAL	WATER WHITE
4	Viscosity@100°C	D 445	2.06
5	ERBP, °C.DRY	SAE J 1703	230
6	ERBP, °C.WET	SAE J 1703	144
7	Density@15°C	D 4052	1.12

AVAILABLE PACKS

250ML, 500ML, 1L



BRAKE FLUID DOT4

MEETS OR EXCEEDS: SAE J1703, FMVSS-116, ISO 4925

TECHNICAL DATA			
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS
			DOT4
1	Appearance	VISUAL	CLEAR & BRIGHT
2	pH	FMVSS 116	8.5
3	Color	VISUAL	WATER WHITE
4	Viscosity@100°C	D 445	2.12
5	ERBP, °C.DRY	SAE J 1703	238
6	ERBP, °C.WET	SAE J 1703	148
7	Density@ 15°C	D 4052	1.13

AVAILABLE PACKS

250ML, 500ML, 1L



ADBLUE

TECHNICAL DATA			
S. No.	PARAMETER	UNITS	TYPICAL RESULTS
1	Urea Content	% by weight	32.5
2	Density @ 0°C	g/ml	1.09
3	Color	Visual	Water White
4	Refractive Index @ 20°C	None	1.382
5	Biuret	% by weight	0.17
6	Aldehyde Content	mg/kg	0.10
7	Insoluble Matter	Mg.kg	0.87

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk




ANTI-FREEZE COOLANT

MEETS OR EXCEEDS: FORD, MAN, SAE J1034, DAVID BROWN, SCANIA, VW, FIAT, BMW

TECHNICAL DATA					
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS		
			AEC 100	AEC 50	AEC 33
	ANTI FREEZE COOLANT				
1	Appearance	Visual	Clear & Bright		
2	Color	Visual	GREEN	GREEN	GREEN
3	Density@15°C.kg/m3	D 1122	1.10	1.06	1.04
4	ERBP,°C, DRY	D 1120	190	140	130
5	pH Value	D 1287	9.5	9.5	9.5
6	Freezing Point, °C	D 3321	-55	-40	-30
7	Inorganic Inhibitor	-	Absence	Absence	Absence
8	Organic Inhibitor	-	Present	Present	Present


AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

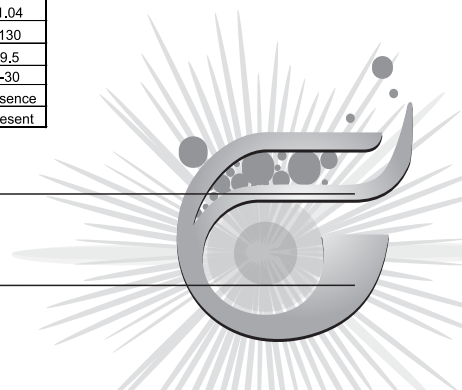



GREASE

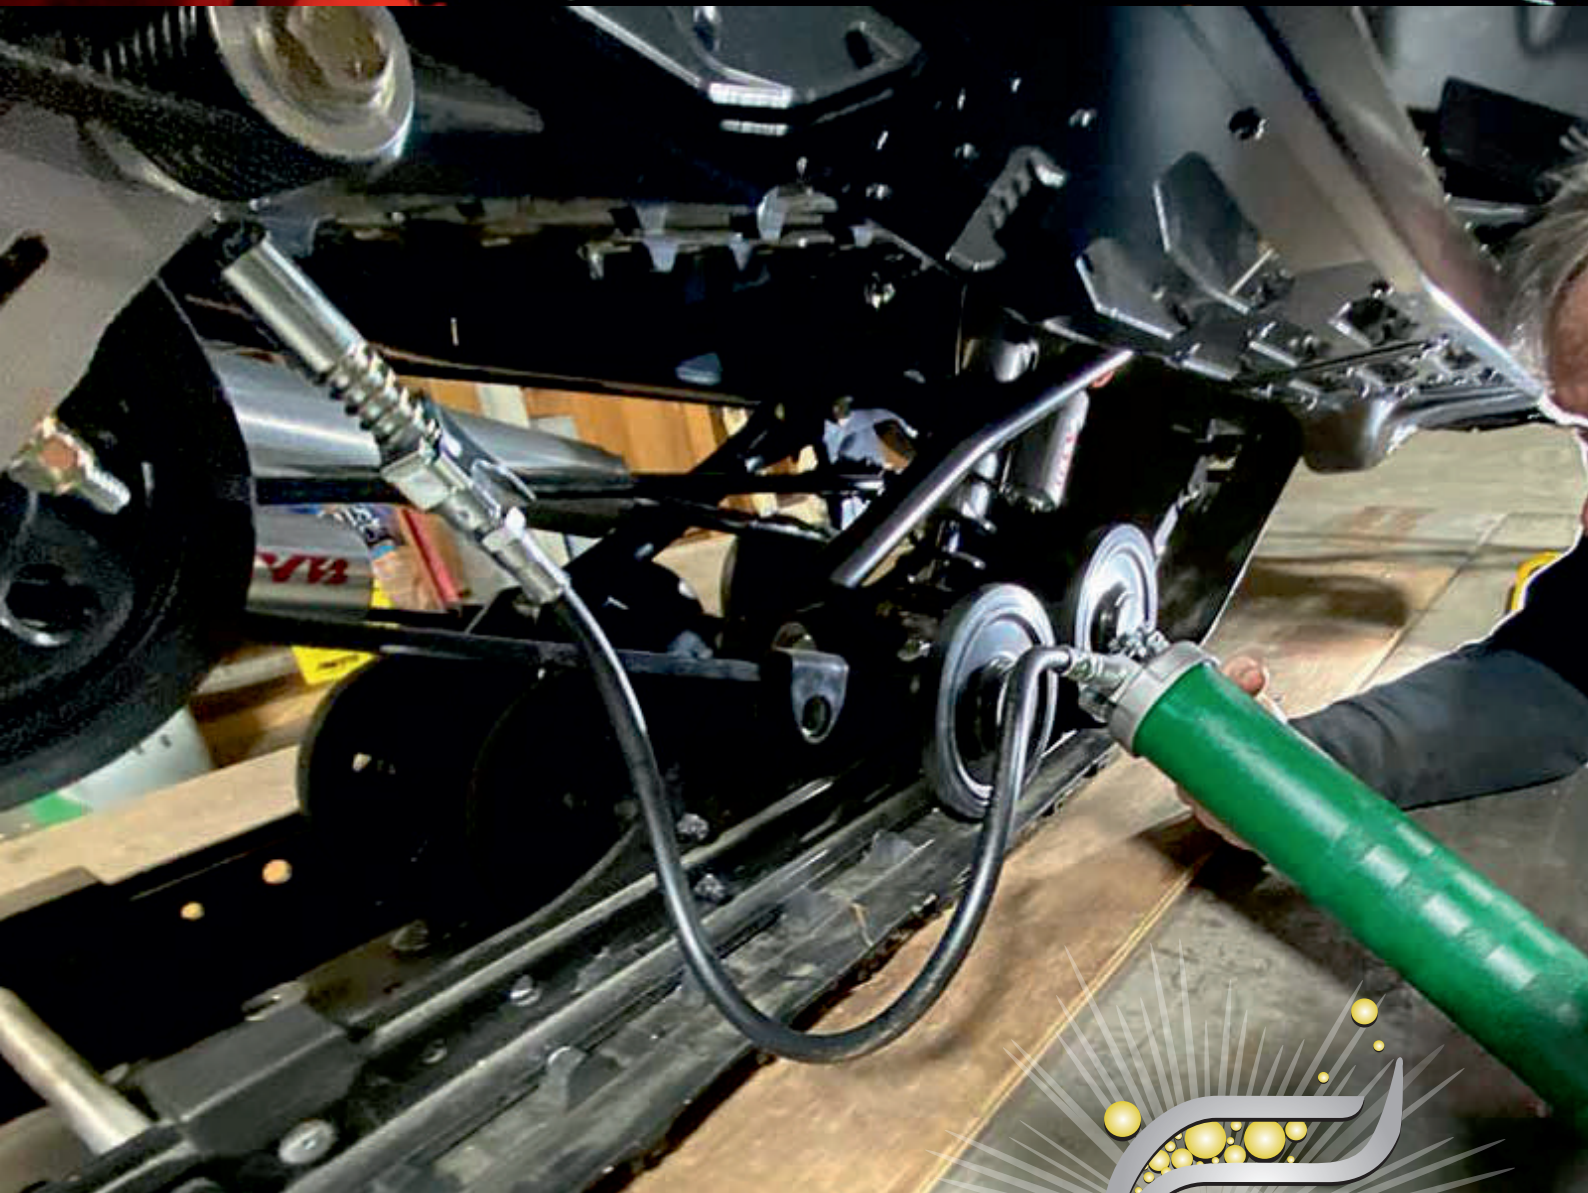

DÆGEON

CALCIUM GREASE EP2



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		EP-0	EP-1	EP-2	EP-3
	Thickener Type		Calcium	Calcium	Calcium	Calcium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

1L, 4L, 5L, 20L, 25L, 208L, Bulk

CALCIUM GREASE EP3



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		EP-0	EP-1	EP-2	EP-3
	Thickener Type		Calcium	Calcium	Calcium	Calcium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk

CALCIUM GREASE MP2



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		MP-0	MP-1	MP-2	MP-3
	Thickener Type		Calcium	Calcium	Calcium	Calcium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk


CALCIUM GREASE MP3



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		MP-0	MP-1	MP-2	MP-3
	Thickener Type		Calcium	Calcium	Calcium	Calcium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk

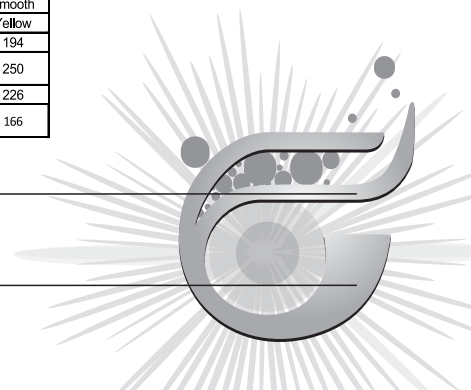

LITHIUM GREASE EP2



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		EP-0	EP-1	EP-2	EP-3
	Thickener Type		Lithium	Lithium	Lithium	Lithium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk

LITHIUM GREASE EP3



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		EP-0	EP-1	EP-2	EP-3
	Thickener Type		Lithium	Lithium	Lithium	Lithium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk

LITHIUM GREASE MP2



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		MP-0	MP-1	MP-2	MP-3
	Thickener Type		Lithium	Lithium	Lithium	Lithium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk

LITHIUM GREASE MP3



TECHNICAL DATA						
S. No.	DESCRIPTION	METHOD	TYPICAL RESULTS			
	NLGI GRADES		NLGI-0	NLGI-1	NLGI-2	NLGI-3
	Property		MP-0	MP-1	MP-2	MP-3
	Thickener Type		Lithium	Lithium	Lithium	Lithium
1	Texture	Visual	Smooth	Smooth	Smooth	Smooth
2	Color	Visual	Yellow	Yellow	Yellow	Yellow
3	Dropping Point, °C	D 566	188	192	192	194
4	Four-Ball, Extreme Pressure, weld load, kgf	D 2596	-	250	250	250
5	Penetration, 60x0.1mm	D 217	372	326	275	226
6	Base Oil Viscosity of Grease at 40°C, mm ² /s.	D 1697	160	164	164	166

AVAILABLE PACKS

250gms, 500gms, 1Kg, 3Kg, 5Kg, 15Kg, 18kg, 20Kg, 180Kg, Bulk





DAEGEON